


75W Triple Output with PFC Function

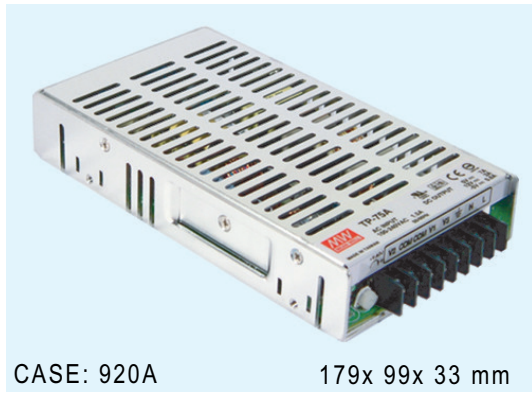

CASE: 920A

179x 99x 33 mm

- Universal AC input / Full range
- PF>0.98@115VAC; >0.95@230VAC
- Thin profile (33mm thickness)
- Protections: Short circuit / Over load / Over voltage
- Cooling by free air convection
- Fixed switching frequency at 134KHz
- Approvals: UL / CUL / TUV / CB / CE
- 3 years warranty

AC input voltage range	90~264VAC; 120~370VDC
AC inrush current	Cold start, 40A at 230VAC
DC adjustment range	CH1: -5~+10% rated output voltage
Over load protection	105~150% hiccup mode, auto-recovery
Over voltage protection	CH1: 115~135% rated output voltage
Withstand voltage	I/P-O/P: 3KVAC, I/P-FG: 1.5KVAC, 1minute
Working temperature	-10°C~60°C (refer to output derating curve)
Safety standards	UL60950-1, TUV EN60950-1 approved
EMC standards	EN55022 class B, EN61000-3-2,3 EN61000-4-2,3,4,5,6,8,11, ENV50204
Connection	8P/ 7.62mm pitch terminal block
Packing	0.65kg ; 20pcs / 12.7kg / 0.64CUFT

Stock No.	Model No.	Output	Tol.	R&N	Effi.	Max.
10511	TP-75A	5V, 1.5~10A	±3%	100mV	70%	74W
		12V, 0.2~4.0A	±4%	120mV		
		-5V, 0.0~0.6A	±8%	100mV		
10512	TP-75B	5V, 1.5~10A	±3%	100mV	70%	76W
		12V, 0.2~4.0A	±4%	120mV		
		-12V, 0.0~0.6A	±8%	120mV		
10513	TP-75C	5V, 1.5~10A	±3%	100mV	70%	75W
		15V, 0.2~3.0A	±4%	120mV		
		-15V, 0.0~0.6A	±8%	120mV		
10514	TP-75D	5V, 1.5~10A	±3%	100mV	70%	76W
		24V, 0.2~2.5A	±4%	120mV		
		12V, 0.0~0.6A	±8%	120mV		
10515	TP-7503	5V, 1.5~10A	±3%	100mV	70%	75W
		3.3V, 0.2~8.0A	±4%	50mV		
		12V, 0.0~0.6A	±8%	120mV		